Structherm Ltd

Bent Ley Road Meltham Holmfirth West Yorkshire, HD9 4AP

Tel: 01484 850098

e-mail: info@structherm.co.uk website: www.structherm.co.uk



Agrément Certificate 18/5576

Product Sheet 3

STRUCTHERM EXTERNAL WALL INSULATION SYSTEMS

STRUC-DASH P EXTERNAL WALL INSULATION SYSTEM

This Agrément Certificate Product Sheet⁽¹⁾ relates to the Struc-Dash P External Wall Insulation System, comprising mechanically fixed phenolic boards (PF) with supplementary adhesive, a glass-fibre-mesh-reinforced basecoat and render finish. It is suitable for use, with height restrictions, on the outside of external masonry walls in new or existing domestic and non-domestic buildings.

(1) Hereinafter referred to as 'Certificate'.


CERTIFICATION INCLUDES:

- factors relating to compliance with Building Regulations where applicable
- factors relating to additional non-regulatory information where applicable
- independently verified technical specification
- assessment criteria and technical investigations
- design considerations
- installation guidance
- regular surveillance of production[†]
- formal three-yearly review.[†]

KEY FACTORS ASSESSED

Thermal performance — the system can be used to improve the thermal performance of external walls and can contribute to satisfying the requirements of the national Building Regulations (see section 6).

Strength and stability — the system can adequately resist wind loads and has sufficient resistance to impact damage (see section 7).



Risk of condensation — the system can contribute to limiting the risk of interstitial and surface condensation (see section 11). **Durability** — when installed and maintained in accordance with the Certificate holder's recommendations and the terms of this Certificate, the system will remain effective for at least 30 years. The durability can be extended to 60 years by using different fixings, and by following a planned inspection and an effective maintenance schedule (see sections 12 and 13).

The BBA has awarded this Certificate to the company named above for the system described herein. This system has been assessed by the BBA as being fit for its intended use provided it is installed, used and maintained as set out in this Certificate.

On behalf of the British Board of Agrément

Date of First issue: 24 February 2020

Hardy Giesler

Chief Executive Officer

Certificate amended on 1 July 2020 to include minor change to fire classification.

This Certificate was amended on 22 May 2024 as part of a transition of The BBA Agrément Certificate scheme delivered under the BBA's ISO/IEC 17020 accreditation. This Certificate was issued originally under accreditation to ISO/ IEC 17025. Sections marked with the synchol 1 are not issued under accreditation. Full conversion to the ISO/IEC 17020 format will take place at the next Certificate review. The BBA is a UKAS accredited Inspection Body (No.4345). Readers MUST check the validity of this Agrément Certificate by either referring to the BBA website or contacting the BBA directly. Any photographs are for illustrative purposes only, do not constitute advice and must not be relied upon.



Watford Herts WD25 9BA tel: 01923 665300 clientservices@bbacerts.co.uk www.bbacerts.co.uk

Regulations

In the opinion of the BBA, the Struc-Dash P External Wall Insulation System, if installed, used and maintained in accordance with this Certificate, can satisfy or contribute to satisfying the relevant requirements of the following Building Regulations (the presence of a UK map indicates that the subject is related to the Building Regulations in the region or regions of the UK depicted):



The Building Regulations 2010 (England and Wales) (as amended)

Requirement:

A1 Loading

Comment:

The system can sustain and transmit wind loads to the substrate wall. See sections 7.1 to

7.10 of this Certificate.

Requirement:

B4(1) External fire spread

Comment: The system is r

The system is restricted by this Requirement. See sections 8.1 to 8.4 of this Certificate.

Requirement:

Comment:

C2(b) Resistance to moisture

The system provides a degree of protection against rain ingress. See section 10.1 of this

Certificate.

Requirement: C2(c)

C2(c) Resistance to moisture

Comment: The system can contribute to minimising the risk of interstitial and surface condensation.

See sections 11.1, 11.2 and 11.4 of this Certificate.

Requirement:

L1(a)(i) Conservation of fuel and power

Comment: The system can contribute to satisfying this Requirement. See sections 6.2 and 6.3 of this

Certificate.

Regulation:

7(1) Materials and workmanship

Comment: The system is acceptable. See sections 13.1 and 13.2 and the Installation part of this

Certificate.

Regulation:

7(2) Materials and workmanship

Comment: The system is restricted by this Regulation. See sections 8.1 to 8.4 of this Certificate.

Regulation: 26 CO₂ emission rates for new buildings

Regulation: 26A Fabric energy efficiency rates for new dwellings (applicable to England only)
Regulation: 26A Primary energy consumption rates for new buildings (applicable to Wales only)

Regulation: 26B Fabric performance values for new dwellings (applicable to Wales only)

Comment: The system can contribute to satisfying these Regulations. See sections 6.2 and 6.3 of

this Certificate.



The Building (Scotland) Regulations 2004 (as amended)

Regulation: 8(1)(2) Durability, workmanship and fitness of materials

Comment: The system can contribute to satisfying this Regulation. See sections 12.1, 12.2, 13.1 and

13.2 and the *Installation* part of this Certificate.

Regulation: 9 Building standards applicable to construction

Standard: 1.1 Structure

Comment: The system can sustain and transmit wind loads to the substrate wall. See sections 7.1 to

7.10 of this Certificate.

Standard: 2.6 Spread to neighbouring buildings

Comment: The system is restricted by this Standard, with reference to clauses 2.6.4⁽¹⁾⁽²⁾, 2.6.5⁽¹⁾ and

2.6.6⁽²⁾. See sections 8.1, 8.2, 8.5 and 8.6 of this Certificate.

Standard: 2.7 Spread on external walls The system is restricted by this Standard, with reference to clauses 2.7.1⁽¹⁾⁽²⁾ and 2.7.2⁽²⁾, Comment: and Annex 2B⁽¹⁾. See sections 8.1, 8.2, 8.5 and 8.6 of this Certificate. Standard: 3.10 Precipitation The system can contribute to satisfying this Standard, with reference to clauses Comment: $3.10.1^{(1)(2)}$ and $3.10.2^{(1)(2)}$. See section 10.1 of this Certificate. Standard: 3.15 Condensation The system will contribute to satisfying this Standard, with reference to clauses Comment: $3.15.1^{(1)(2)}$, $3.15.4^{(1)(2)}$ and $3.15.5^{(1)(2)}$. See sections 11.3 and 11.4 of this Certificate. Standard: 6.1(b) Carbon dioxide emissions Standard: 6.2 Building insulation envelope Comment: The system can contribute to satisfying these Standards, with reference to clauses (or parts of) $6.1.1^{(1)}$, $6.1.2^{(1)(2)}$, $6.1.3^{(1)(2)}$, $6.1.4^{(2)}$, $6.1.6^{(1)}$, $6.1.8^{(2)}$, $6.1.10^{(2)}$, $6.2.1^{(1)(2)}$, $6.2.3^{(1)}$, $6.2.4^{(1)}$, $6.2.5^{(1)(2)}$, $6.2.6^{(2)}$, $6.2.7^{(2)}$, $6.2.11^{(1)}$ and $6.2.13^{(2)}$. See sections 6.2 and 6.3 of this Certificate. Standard: 7.1(a)(b) Statement of sustainability Comment: The system can contribute to satisfying the relevant requirements of Regulation 9, Standards 1 to 6, and therefore will contribute to a construction meeting the bronze level of sustainability as defined in this Standard. In addition, the system can contribute to a construction meeting a higher level of sustainability as defined in this Standard, with reference to clauses 7.1.4⁽¹⁾⁽²⁾ [Aspect $1^{(1)(2)}$ and $2^{(1)}$], 7.1.6⁽¹⁾⁽²⁾ [Aspect $1^{(1)(2)}$ and $2^{(1)}$] and 7.1.7 $^{(1)(2)}$ [Aspect $1^{(1)(2)}$]. See sections 6.2 and 6.3 of this Certificate. Regulation: 12 **Building standards applicable to conversions** Comment: All comments given for the system under Regulation 9, Standards 1 to 6, also apply to this Regulation, with reference to clause $0.12.1^{(1)(2)}$ and Schedule $6^{(1)(2)}$. (1) Technical Handbook (Domestic). (2) Technical Handbook (Non-Domestic).



The Building Regulations (Northern Ireland) 2012 (as amended)

Regulation: 23 Fitness of materials and workmanship

Comment: The system is acceptable. See sections 13.1 and 13.2 and the *Installation* part of this

Certificate.

Regulation: 28(b) Resistance to moisture and weather

Comment: Walls insulated with the system will satisfy this Regulation. See section 10.1 of this

Certificate.

Condensation Regulation: 29 Comment:

Walls insulated with the system will satisfy the requirements of this Regulation. See

section 11.4 of this Certificate.

Stability Regulation: 30

Comment: The system can sustain and transmit wind loads to the substrate wall. See sections 7.1 to

7.10 of this Certificate.

Regulation: 36(a) **External fire spread** Comment: The system is restricted by this Regulation. See sections 8.1 to 8.4 of this Certificate.

Regulation: 39(a)(i) **Conservation measures** Regulation: 40 Target carbon dioxide emission rate

Comment: The system can contribute to satisfying these Regulations. See sections 6.2 and 6.3 of

this Certificate.

Construction (Design and Management) Regulations 2015 Construction (Design and Management) Regulations (Northern Ireland) 2016

Information in this Certificate may assist the client, designer (including Principal Designer) and contractor (including Principal Contractor) to address their obligations under these Regulations.

See sections: 3 Delivery and site handling (3.2 and 3.4) and 12 Maintenance and repair of this Certificate.

Additional Information

NHBC Standards 2020

In the opinion of the BBA, the Struc-Dash P External Wall Insulation System, if installed, used and maintained in accordance with this Certificate, can satisfy or contribute to satisfying the relevant requirements in relation to NHBC Standards, Part 6 Superstructure (excluding roof), Chapter 6.9 Curtain walling and cladding.

Technical Specification

1 Description

- 1.1 The Struc-Dash P External Wall Insulation System comprises phenolic (PF) insulation boards, mechanically fixed with supplementary adhesive, with a reinforcing glass fibre mesh embedded in the basecoat, and a render finish. The system can be designed to achieve either a 30- or 60-year durability (see Figure 1 and section 16).
- 1.2 The insulation boards are fixed to the external surface of the wall using mechanical fixings and supplementary adhesive (ensuring a minimum of 40% coverage of adhesive is achieved). The system is mechanically fixed through the reinforcement mesh to the external surface of the substrate wall, before reinforcing mesh patches are applied over the fixing heads and fully embedded (alternatively, a second layer of mesh is applied). Further basecoat is used, to maintain an approximate 6 mm thickness when measured from the top of the fixing heads. When the basecoat has dried, the render finish is applied. The durability can be extended to 60 years by using different types of fixings (section 1.3) and following the requirements of sections 4.14, 13.2 and 16 of this Certificate.
- 1.3 The system comprises:

Insulation⁽¹⁾

- phenolic insulation boards (PF) 1200 by 600 mm in a range of thicknesses between 40⁽²⁾ and 120 mm in 10 mm increments, with a nominal density of 40 kg·m⁻³, a minimum tensile strength of 50 kN·m⁻² and a minimum compressive strength of 150 kN·m⁻². Boards are manufactured to comply with the requirements of BS EN 13166: 2012.
- (1) For declared thermal conductivity values (λ_D), see section 6.1
- (2) Insulation thicknesses of 20 and 30 mm are available, and would generally be used in reveals.

Mechanical fixings

- mechanical fixings— anchors with adequate length to suit the substrate and the insulation thickness, approved and supplied by the Certificate holder:
 - Ejotherm NT U⁽¹⁾— polyethylene anchor sleeve with a stainless steel⁽²⁾ or galvanized steel pin.
- (1) Other fixings may be used provided they can be demonstrated to have equal or higher pull-out, plate diameter and plate stiffness characteristics
- (2) In order to achieve a 60-year durability performance, polyethylene (HDPE), polyamide or polypropylene anchor sleeve must be used with a stainless steel pin or screw to grades 1.4301 or 1.4401 to BS EN 10088-2: 2014.

Basecoat and adhesive (supplementary)

- Structherm HP14 High Polymer Basecoat— cementitious, polymer-modified basecoat⁽¹⁾. Supplied as a powder and mixed with 5 to 6 litres of clean water. Applied in two layers to an overall thickness of 4 to 6 mm, with a coverage of 8 to 11 kg.m⁻².
- (1) Also used as the supplementary adhesive.

Reinforcement

• reinforcing mesh — alkali-resistant glass fibre mesh, 1 m wide with a 3.5 by 3.5 mm grid size, organic content of 20%, PCS value of 8.17 MJ·kg⁻¹ and nominal weight of 160 g·m⁻²

Finish

- Struc-Dash cement-based, polymer-modified dash receiver, mixed with 5 to 6 litres of clean water and applied to a 6 to 10 mm thickness, with a coverage of 10 to 15 kg·m⁻². Available in a range of colours
- Dash aggregates 4 to 8 mm aggregates, available in a range of colours.

Figure 1 The Struc-Dash P External Wall Insulation System substrate insulation board glass fibre reinforcement mesh supplementary adhesive finish coat initial mechanical fixing through the insulation mechanical fixing through the mesh with glass fibre mesh patch system build-up (30 and 60-year durability) additional glass fibre mesh patch 150 mm x 150 mm embedded in basecoat insulation fixing through layer of glass fibre mesh insulation board

Page 5 of 23

- 1.4 Ancillary materials also used with the system include profiles⁽¹⁾, comprising:
- aluminium, powder-coated galvanized steel, PVC-U or stainless steel
 - base profile
 - edge profile
 - corner profile
 - render stop end
 - V expansion and movement joint profiles.
- (1) For a 60-year durability system, stainless steel must be used for some profiles see section 13.2 for more information.
- 1.5 Ancillary materials also used with the system, but outside the scope of this Certificate, are:
- silicone-based joint sealant
- algae and fungal wash
- fire barrier
- PU foam filler
- sealing tape.

2 Manufacture

- 2.1 As part of the assessment and ongoing surveillance of product quality, the BBA has:
- agreed with the manufacturer the quality control procedures and product testing to be undertaken
- assessed and agreed the quality control operated over batches of incoming materials
- · monitored the production process and verified that it is in accordance with the documented process
- evaluated the process for management of nonconformities
- checked that equipment has been properly tested and calibrated
- undertaken to carry out the above measures on a regular basis through a surveillance process, to verify that the specifications and quality control operated by the manufacturer are being maintained.
- 2.2 The management system of Structherm Ltd has been assessed and registered as meeting the requirements of BS EN ISO 9001: 2015, BS EN ISO 14001: 2015 and BS ISO 45001: 2018 by Construction Products Certification (CPC) (Certificate numbers CP 00214, CP 00045 & CP OHS 00018).

3 Delivery and site handling

- 3.1 The insulation is delivered to site shrink-wrapped in polythene packs bearing the manufacturer's and product identification and batch numbers.
- 3.2 The other components are delivered in the quantities and packages listed in Table 1. Each package carries the manufacturer's and product identification and batch number. The basecoat and render also include the BBA logo incorporating the number of this Certificate.

Table 1 Component supply details	
Component	Quantity and packaging
Dash aggregates	25 kg bags
Struc-Dash	25 kg bags
Structherm HP14 High Polymer Basecoat	
(basecoat and adhesive)	25 kg bags
reinforcing mesh	50 m length by 1 m wide rolls
mechanical fixings	boxed by the manufacturer

3.3 The boards should be stored in dry conditions off the ground on a firm, clean, level base, and must be protected from prolonged exposure to sunlight either by storing opened packs under cover or re-covering with opaque polythene sheeting.

- 3.4 Care must be taken when handling the boards to avoid both damage and contact with solvents or bitumen products. The boards must not be exposed to open flame or other ignition sources. Boards that become damaged, soiled or wet should be discarded.
- 3.5 The render components should be stored in dry conditions, off the ground and protected from frost at all times. Bags of unopened render finish will have a shelf-life of 12 months when stored correctly. Damaged, wet or contaminated products should not be used and must be discarded.

Assessment and Technical Investigations

The following is a summary of the assessment and technical investigations carried out on the Struc-Dash P External Wall Insulation System.

Design Considerations

4 General

- 4.1 The Struc-Dash P External Wall Insulation System, when installed in accordance with this Certificate, is satisfactory for use in reducing the thermal transmittance (U value) of external masonry or concrete walls of new and existing buildings. It is essential that the detailing techniques specified in this Certificate are carried out to a high standard if the ingress of water into the insulation is to be avoided and the full thermal benefit obtained from treatment with the system (eg the insulation must be protected by an overhang, and window sills should be designed and installed so as to direct water away from the building).
- 4.2 For improved thermal/carbon-emissions performance of the structure, the designer should consider additional/alternative fabric and/or services measures.
- 4.3 The system is for application to the outside of external walls of masonry, normal weight concrete, lightweight concrete, autoclaved concrete and no-fines concrete construction, on new or existing domestic and non-domestic buildings (with or without existing render) up to 18 m in height in England, Wales and Northern Ireland, or with no storey more than 11 m above the ground in Scotland. Prior to installation of the system, wall surfaces should comply with section 14 of this Certificate.
- 4.4 New walls subject to the national Building Regulations should be constructed in accordance with the relevant recommendations of:
- BS EN 1992-1-1: 2004 and its UK National Annex
- BS EN 1996-1-1: 2005 and its UK National Annex
- BS EN 1996-2: 2006 and its UK National Annex
- BS 8000-0: 2014BS 8000-2.2: 1990BS 8000-3: 2001.
- 4.5 New walls not subject to regulatory requirements should also be built in accordance with the Standards listed in section 4.4.
- 4.6 Movement joints should be incorporated into the system in line with existing expansion joints in the building structure in accordance with the Certificate holder's recommendations for the specific installation.
- 4.7 The system will improve the weather resistance of a wall and provide a decorative finish. However, for existing buildings, it should only be installed where there are no signs of dampness on the inner surface of the wall other than those caused solely by condensation.
- 4.8 The effect of the system on the acoustic performance of a construction is outside the scope of this Certificate.
- 4.9 The fixing of sanitary pipework, plumbing, rainwater goods, satellite dishes, clothes lines, hanging baskets and similar items to the system is outside the scope of this Certificate (see section 4.10).

- 4.10 External pipework and ducts should be removed before installation, and alterations made to underground drainage to accommodate repositioning of the pipework to the finished face of the system. The Certificate holder may advise on suitable fixing methods, but these are outside the scope of this Certificate.
- 4.11 The designer should select a construction appropriate to the local wind-driven rain index, paying due regard to the design detailing, workmanship and materials to be used.
- 4.12 It is essential that the system is installed and maintained in accordance with the conditions set out in this Certificate.
- 4.13 The system can be adapted to achieve an extended service life of 60 years instead of the standard 30. The difference between 30- and 60-year durability systems is covered in sections 1.2, 12 and 13, with the detailed installation procedures covered in section 16.
- 4.14 For 60-year durability systems, the following components must be constructed from stainless steel grade 1.4301 or 1.4401 to BS EN 10088-2: 2014
- base profile and render stop end including the fixings. In addition, any other profile component which would remain exposed after the application of the finish coat
- corner profile (if exposed after application of the system)
- pin or screw for mechanical fixings.

5 Practicability of installation

The system should be installed only by specialist contractors who have successfully undergone training and registration by the Certificate holder.

Note: The BBA operates a UKAS-accredited Approved Installer Scheme for external wall insulation; details of approved installer companies are included on the BBA's website (www.bbacerts.co.uk).

6 Thermal performance

6.1 Calculations of thermal transmittance (U value) should be carried out in accordance with BS EN ISO 6946 : 2017 and BRE Report BR 443 : 2006, using the thermal conductivities (λ_D value) given in Table 2, below.

Table 2 Declared thermal conductivity (λ_D) values				
Phenolic insulation board (PF) thickness	λ _D value			
_ (mm)	(W·m ⁻¹ ·K ⁻¹)			
40 to 44	0.021			
> 45	0.020			



6.2 The U value of a completed wall will depend on the insulation thickness, the type and number of fixings, and the insulating value of the substrate masonry and its internal finish. Calculated U values for sample constructions in accordance with the national Building Regulations are given in Table 3 and are based on the thermal conductivities given in Table 2.

				. (4)/2)/2)
Table 2 In	sulation thickne	acc roquirod to	achious II	1
TUDIE 5 III	Sululion inickni	255 (PUUIIPU 10)	UCHIEVE O	VIIIIPS

U value ⁽⁴⁾	Thickness of insulation (mm)			
(W·m ⁻² ·K ⁻¹)	215 mm brickwork, $\lambda = 0.56 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$	200 mm dense blockwork, $\lambda = 1.75 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$		
0.18	110	120		
0.19	100	110		
0.25	80	80		
0.26	70	80		
0.28	70	70		
0.30	60	70		
0.35	50	60		

- (1) Wall construction inclusive of 13 mm plaster (λ = 0.57 W·m⁻¹·K⁻¹), brickwork (protected) with 17.1% mortar or dense blockwork with 6.7% mortar (λ = 0.88 W·m⁻¹·K⁻¹). Declared thermal conductivity of insulation values (λ_D) is as shown in Table 2. A 5 mm thick adhesive layer (λ = 1 W·m⁻¹·K⁻¹) covering 100% of the area is also included and a board emissivity of 0.9, together with an external render thickness of 7.5 mm with λ = 1 W·m⁻¹·K⁻¹.
- (2) Calculations based on a system that included 7 stainless steel fixings per square metre with a point thermal transmittance (x_p) of 0.002 W·K⁻¹ per steel pin. Use of other types of fixings should be calculated in accordance with BS EN ISO 6946: 2017.
- (3) Based upon incremental insulation thickness of 10 mm.
- (4) When applying the maximum available insulation thickness, these walls can achieve U values of 0.17 W·m⁻²·K⁻¹.
- 6.3 Care must be taken in the overall design and construction of junctions with other elements and openings to minimise thermal bridges and air infiltration. Detailed guidance can be found in the documents supporting the national Building Regulations.

7 Strength and stability

General



- 7.1 The Certificate holder is ultimately responsible for the design of the system and it is the responsibility of the company installing the system to accurately follow the installation instructions (see also section 5 of this Certificate). The Certificate holder must also verify that a suitably experienced and qualified individual (with adequate professional indemnity) establishes that:
- the wind loads on the different zones of the building's elevation for the specific geographical location have been calculated correctly (see section 7.3)
- the system can adequately resist and safely transfer the calculated loads, accounting for all possible failure modes, to the substrate wall and supporting structure (see sections 7.3 to 7.6).
- 7.2 The substrate and supporting structure must be capable of transferring all additional loading due to the installation of the system to the ground in a satisfactory manner. The adequacy of the substrate and supporting structure must be verified by the person or party responsible for the global stability of the building to which the system is applied. Any defects should be made good prior to the system being installed.
- 7.3 The wind loads on the walls should be calculated, taking into account all relevant factors such as location and topography, in accordance with BS EN 1991-1-4: 2005 and its UK National Annex. All of the factors affecting wind load on each elevation and specific zones of the building must be considered. In accordance with BS EN 1990: 2002 and its UK National Annex, a partial factor of 1.5 must be applied to the calculated characteristic wind pressure values to establish the design wind load to be resisted by the system.
- 7.4 Installations correctly designed in accordance with this Certificate will safely accommodate the applied loads due to the self-weight of the system, wind and impact.
- 7.5 Positive wind load is transferred to the substrate wall directly via compression through the render and insulation system.
- 7.6 Negative wind load is transferred to the substrate wall via⁽¹⁾⁽²⁾:
- the bond between the insulation and the rendering system
- the pull-out resistance of the fixing from the substrate wall (see section 7.7)

- the resistance of the anchor plate to breakdown or detachment
- the resistance of mesh fabric to tearing around the anchor plate.
- (1) For mechanically fixed systems (with supplementary adhesive) fixed through the mesh and insulation, the resistance of the system to negative wind load is obtained from the Static Foam Block (SFB) test
- (2) Further guidance is available from BBA Guidance Note 1, available on the BBA website (www.bbacerts.co.uk).
- 7.7 Typical characteristic pull-out resistances for the fixings taken from the corresponding European Technical Assessment (ETA) are given in Table 4; the values are dependent on the fixing type which must be selected to suit the specific loads and substrate concerned. In situations where suitable data does not exist⁽¹⁾, the characteristic pull-out resistance must be established from site-specific pull-out tests conducted on the substrate of the building to ascertain the minimum resistance to pull-out failure of the fixings, and determined in accordance with the guidance given in EOTA TR051 : 2016 (minimum test characteristic value = 0.6 x mean of 5 lowest test results). To obtain the design pull-out resistance of the fixings (N_{RD2}), this characteristic pull-out resistance should then be divided by the partial safety factor given in Table 4.
- (1) To qualify as suitable data, the age and condition of the substrate must be equivalent to that used to establish the values in the ETA.

Table 4 Fixings — typical characteristic pull-out resistances

Fixing type ⁽¹⁾	ETA number	Substrate	Drill diameter (mm)	Effective anchorage depth (mm)	Characteristic pull- out resistance (kN) ⁽²⁾	Partial factor
Ejotherm NT U	05/0009	Concrete C12/15 Clay brickwork	8	25	1.2 1.5	2

- (1) The minimum value for plate stiffness of the fixing is 0.6 kN·mm⁻² and the minimum load resistance is 1.4 kN. Anchors with equal or better properties can be used with the system
- (2) Values are determined in accordance with EAD 330196-00-0604 : 2016 and are dependent on the substrate. The Use Categories are defined in the corresponding ETA.
- 7.8 The Static Foam Block (SFB) test was carried out on the Struc-Dash P External Wall Insulation, mechanically fixed onto a masonry substrate. Phenolic insulation board with a 60 mm thickness was fixed through the reinforcement mesh with 7 fixings per square metre (using Ejotherm mushroom-head fixings) before the render finish was applied. The maximum characteristic negative wind load resistance that can be sustained by the system as determined from the SFB test is 7.42 kN·m⁻². The maximum design negative wind load resistance (Rd_{Test}) is derived by dividing the maximum characteristic wind load resistance by a partial safety factor of 2.5 and is equal to 2.97 kN·m⁻²⁽¹⁾⁽²⁾⁽³⁾⁽⁴⁾⁽⁵⁾.
- (1) The maximum design wind load that can be resisted by the system corresponds to the maximum allowed spacing, centres and layout of fixings. This fixing configuration, with appropriately selected fixings, will also adequately transfer the system's self-weight, wind and impact loads to a suitable substrate wall
- (2) The SFB test is carried out on the system without supplementary adhesive. Minimum coverage area of supplementary adhesive for site installations must be 40%
- (3) The partial factor for the SFB is based on the mode of failure obtained in the test
- (4) The design resistance is determined by dividing the characteristic resistance value obtained from the SFB test by a partial safety factor of 2.5. The characteristic resistance value obtained from an SFB test was 7.42 kN·m⁻²
- (5) Alternative fixings may be used provided they can be demonstrated to have equal or higher plate diameter (minimum 60 mm), plate stiffness (≥ 0.6 kN·mm⁻²) and anchor plate load resistance (≥ 2.43 kN) characteristics.
- 7.9 The data derived from sections 7.7 and 7.8 must be assessed against the design wind load, and the following expressions must be satisfied:

For safe design:

 $R_{dTest} \ge W_e and n_{RD2} \ge We$

Where:

R_{dTest} is the design negative wind load resistance of the system based on test (kN.m⁻²)

We is the maximum design wind load (kN·m⁻²)

is the design pull-out resistance of the system based on characteristic values from site tests. The number of fixings per unit area must be \geq as tested in the SFB test (kN·m⁻²).

7.10 The insulation system is mechanically fixed through the mesh and insulation to the substrate wall with a minimum of 7 fixings per square metre, as per the fixing patterns shown in Figure 5, and in conjunction with a minimum 40% coverage of supplementary adhesive (see section 16 of this Certificate). The design wind load resistance is only applicable to the system tested and as described in 7.8. No enhancement to the wind load resistance may be gained by the addition of more fixings; however, additional fixings may be required depending on the design and installation conditions.

Impact resistance

7.11 Hard body impact tests were carried out in accordance with ETAG 004 : 2013. The system is suitable for use in all categories⁽¹⁾.

(1) The Use Categories are defined in ETAG 004: 2013 as:

- Category I a zone readily accessible at ground level to the public and vulnerable to hard body impacts but not subjected to abnormally rough use
- Category II a zone liable to impacts from thrown or kicked objects, but in public locations where the height of the system will limit the size of the impact; or at lower levels where access to the building is primarily to those with some incentive to exercise care
- Category III a zone not likely to be damaged by normal impacts caused by people or by thrown or kicked objects.

8 Behaviour in relation to fire




- 8.1 The reaction to fire classification⁽¹⁾ for the system is B-s1, d0 in accordance with BS EN 13501-1: 2018.
- (1) Exova Warringtonfire Test Report 319310. A copy is available from the Certificate holder on request.
- 8.2 The classification applies to the full range of thicknesses, finishes and colours covered by this Certificate.



- 8.3 The insulation in isolation is not classified as 'non-combustible' or of limited combustibility.
- 8.4 In England, Wales and Northern Ireland, the system is restricted for use on buildings up to 18 m in height, at any proximity to a boundary.



- 8.5 In Scotland, the system is not classified as 'non-combustible' and may be used on buildings more than 1 m from a boundary and, on houses, 1 m or less from a boundary. With minor exceptions, the system should be included in calculations of unprotected area, except on houses where the external wall behind has the appropriate fire resistance.
- 8.6 The system should not be used on any building with a storey more than 11 m above the ground, or on any entertainment or assembly building with a total storey area more than 500 m^2 , or on any hospital or residential care building with a total storey area more than 200 m^2 .
- 8.7 For application to second storey walls and above, at least one stainless steel fixing per square metre should be used, and fire barriers are recommended in line with compartment walls and floors as advised in BRE Report BR 135: 2013 (see Figure 2 of this Certificate).

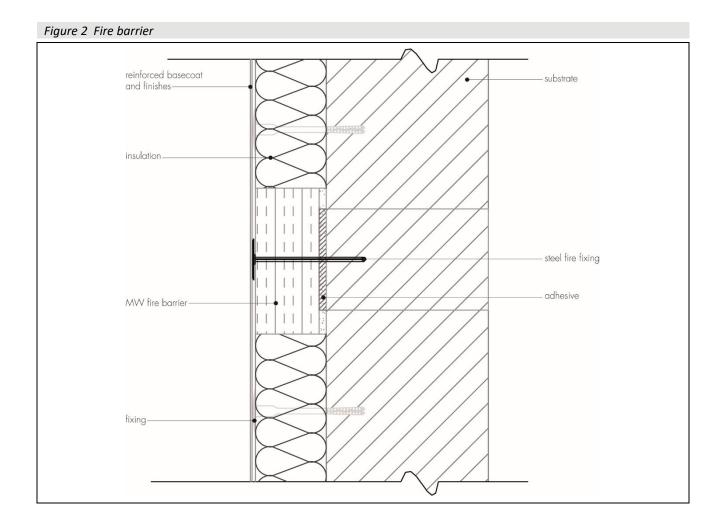

9 Proximity of flues and appliances

When the system is installed in close proximity to certain flue pipes, the relevant provisions of the national Building Regulations should be satisfied:

England and Wales — Approved Document J **Scotland** — Mandatory Standard 3.19, clause 3.19.4⁽¹⁾⁽²⁾

- (1) Technical Handbook (Domestic).
- (2) Technical Handbook (Non-Domestic).

Northern Ireland — Technical Booklet L.

10 Water resistance



10.1 The system will provide a degree of protection against rain ingress. Care should be taken to ensure that walls are adequately weathertight prior to the application of the system. The system must only be installed where there are no signs of dampness on the inner surface of the substrate other than those caused solely by condensation.

- 10.2 Designers and installers should take particular care in detailing around openings, penetrations and movement joints to minimise the risk of rain ingress.
- 10.3 The guidance given in BRE Report BR 262: 2002 should be followed in connection with the water resistance of solid wall constructions. The designer should select a construction appropriate to the local wind-driven rain index, paying due regard to the design detailing, workmanship and materials to be used.
- 10.4 At the tops of walls, the system should be protected by an adequate overhang or other detail designed for use with this type of system (see section 16.24 of this Certificate).

11 Risk of condensation



11.1 Designers must ensure that an appropriate condensation risk analysis has been carried out for all parts of the construction, including openings and penetrations at junctions between the insulation system and windows, to minimise the risk of condensation. The recommendations of BS 5250: 2011 should be followed.

Surface condensation



11.2 Walls will adequately limit the risk of surface condensation when the thermal transmittance (U value) does not exceed 0.7 $W \cdot m^{-2} \cdot K^{-1}$ at any point and the junctions with other elements and openings comply with section 6.3.



11.3 Walls will adequately limit the risk of surface condensation when the thermal transmittance (U value) does not exceed 1.2 W·m $^{-2}$ ·K $^{-1}$ at any point. Guidance may be obtained from BS 5250 : 2011 (Section 4, and Annexes D and G) and BRE Report BR 262 : 2002.

Interstitial condensation



11.4 Walls incorporating the system will adequately limit the risk of interstitial condensation when they are designed and constructed in accordance with BS 5250 : 2011 (Section 4, and Annexes D and G) and section 11.5 of this Certificate.

11.5 The water vapour resistance factor (μ) (for the insulation boards) and equivalent air layer thickness (sd) (for the render systems) is shown in Table 5.

Table 5 Water vapour resistance	factor and	eauivalent air la	ver thickness
---------------------------------	------------	-------------------	---------------

Layers	Thickness (mm)	s _d (m)	μ
Phenolic (PF)	40 to 200	_	50 ⁽¹⁾
Rendering system:			
finish coat + decorative coat, as indicated below:			
Struc-Dash + dash aggregates	12	0.23(2)	-

- (1) The factor (μ value) of the insulation is taken from BS EN 13166 : 2012
- (2) To be determined in each case.

12 Maintenance and repair



- 12.1 An initial inspection should be made within 12 months and regularly thereafter to include:
- visual inspection of the render for signs of damage. Cracks in the render exceeding 0.2 mm must be repaired
- examination of the sealant around openings and service entry points
- visual inspection of architectural details designed to shed water to confirm that they are performing properly
- visual inspection to ensure that water is not leaking from external downpipes or gutters; such leakage could penetrate the rendering
- necessary repairs effected immediately and the sealant joints at window and door frames replaced at regular intervals
- maintenance schedules, which should include the replacement and resealing of joints (for example, between the system and window and door frames).
- 12.2 Damaged areas must be repaired using the appropriate components and procedures detailed in the Certificate holder's installation instructions and in accordance with BS EN 13914-1 : 2016.

12.3 For a 60-year durability, a detailed maintenance plan must be prepared and provided to the building manager/owner on completion. As a minimum, this should include an inspection for evidence of defects 12 months after the application and subsequently every five years.

13 Durability



- 13.1 The system will remain effective for at least 30 years provided any damage to the render finish is repaired immediately and regular maintenance is undertaken, as described in section 12 of this Certificate.
- 13.2 A 60-years' service life requires the use of stainless steel base and corner profiles, stainless steel centre pin fixings [304 Grade (1.4301)] and plastic anchor sleeve materials such as polyamide (PA6 and PA6.6), polyethylene (PE) or polypropylene (PP), and the following of an appropriate repair and maintenance schedule as covered by the Certificate holder's *Repair and maintenance manual* (and also as described in section 12 of this Certificate). Any damage to the surface finish must be repaired within a time period agreed by the Certificate holder.
- 13.3 Any render containing Portland cement may be subject to lime bloom. The occurrence of this may be reduced by avoiding application in adverse weather conditions. The effect is transient and less noticeable on lighter colours.
- 13.4 The finish may break up the flow of water on the surface and reduce the risk of discoloration by water runs. The finish may become discoloured with time, the rate depending on locality, initial colour, the degree of exposure and atmospheric pollution, as well as on the design and detailing of the wall. In common with traditional renders, discoloration by algae and lichens may occur in wet areas.
- 13.5 To maintain a high quality aesthetic appearance, it may be necessary to periodically overcoat the building using a suitable masonry coating (ie one covered by a valid BBA Certificate for this purpose). Care should be taken not to adversely affect the water vapour transmission or fire characteristics of the system. The advice of the Certificate holder should be sought as to the suitability of a particular product.

Installation

14 Site survey and preliminary work

- 14.1 A pre-installation survey of the property must be carried out to determine suitability for treatment and the need for any necessary repairs to the building structure before application of the system. A specification is prepared for each elevation of the building indicating:
- the position of beads
- detailing around windows and doors and at eaves
- damp-proof course (dpc) level
- exact position of expansion joints, if required
- additional corner mesh and reinforcement, where required
- · areas where flexible sealants must be used
- any alterations to external plumbing, if required.
- 14.2 The survey should include tests conducted on the walls of the building by the Certificate holder or their approved installers (see section 15 of this Certificate) to determine the pull-out resistance for mechanical fixings for the appropriate substrate. An assessment is carried out and recommendation is made on the type and number of fixings required to withstand the building's expected wind loading, based on calculations using the fixing's pull-out resistance test data (see sections 7 and 16 of this Certificate). The advice of the Certificate holder should be sought to ensure the proposed fixing pattern is sufficient.
- 14.3 Surfaces should be sound, clean and free from loose material. The flatness of surfaces must be checked; this may be achieved using a straight edge tool spanning the storey height. Any excessive irregularities, ie greater than 10 mm in one metre, must be made good prior to installation to ensure that the boards are installed with a smooth, in-plane finished surface.

- 14.4 Where surfaces are covered with an existing render, it is essential that the bond between the background and the render is adequate. All loose areas should be hacked off and reinstated.
- 14.5 On existing buildings, purpose-made window sills must be fitted to extend beyond the finished face of the system. New buildings should incorporate suitably deep sills.
- 14.6 Internal wet work, eg screed or plastering, should be completed and allowed to dry prior to application of the system.
- 14.7 All modifications and necessary repairs to the building structure must be completed before installation commences.

15 Approved installers

Application of the system, within the context of this Certificate, must be carried out by approved installers recommended or recognised by the Certificate holder. Such an installer is a company:

- · employing operatives who have been trained and approved by the Certificate holder to install the system
- which has undertaken to comply with the Certificate holder's application procedure, containing the requirement for each application team to include at least one member-operative trained by the Certificate holder
- subject to at least one inspection per annum by the Certificate holder to ensure suitable site practices are being employed. This may include unannounced site inspections.


16 Procedure

General

- 16.1 Application must be carried out in accordance with the Certificate holder's current installation instructions and this Certificate.
- 16.2 Weather conditions should be monitored to ensure correct application and curing conditions. Application of coating materials must not be carried out at temperatures below 5 or above 30°C, or if exposure to frost is likely, and the coating must be protected from rapid drying.
- 16.3 All rendering should be in accordance with the relevant recommendations of BS EN 13914-1: 2016.

Positioning and securing boards

- 16.4 The base profile⁽¹⁾ is secured to the external wall above the dpc using the approved profile fixings at approximately 300 mm centres (see Figure 3). Base profile connectors are inserted at all rail joints. Clip-on drip beads are fixed to the front lip of the base profile where appropriate.
- (1) For 60-year durability applications, the base profile needs to be constructed using stainless steel material.

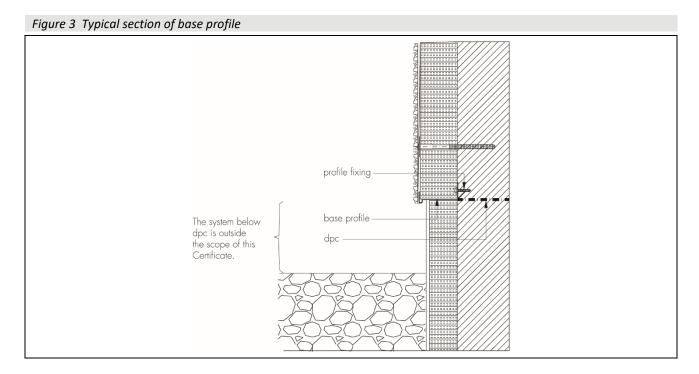


- 16.5 The supplementary adhesive is prepared with 5 to 6 litres of water per bag (see section 1.3 of this Certificate), and mixed with a paddle mixer until the desired consistency is achieved. After allowing the adhesive to rest for 5 minutes, it is applied in a continuous bordering strip around the perimeter of the board with three additional dabs, approximately 10 to 40 mm wide, distributed uniformly over the remaining surface. Alternatively, a serrated edge trowel with 5 mm serrations can be used to apply the adhesive to the entire rear surface of the board.
- 16.6 The first run of boards is positioned on the perforated base profile and butted tightly together. Subsequent rows of boards are positioned so that vertical joints are staggered and overlapped at the building corners by at least 200 mm. Joints between boards greater than 2 mm should be filled with PU foam filler. Gaps greater than 10 mm should be closed by repositioning or, where appropriate, by cutting boards to fit. Alignment should be checked as work proceeds.
- 16.7 A hole is drilled through the centre of each board into the substrate, so that one mechanical fixing can be applied per board to help initially secure boards during installation (see Figure 5).
- 16.8 To fit around details such as doors and windows, the boards may be cut with a sharp knife or fine-tooth saw. If required, purpose-made window sills designed to prevent water ingress and incorporating drips to shed water clear of the system are fitted, but their performance is outside the scope of this Certificate.
- 16.9 Installation continues until the whole wall is completely covered including, where appropriate, the building soffits. Building corners, door and window heads and jambs are formed using mesh angle profiles bonded to the insulation. Where appropriate, application-specific profiles are installed to allow rainwater to drain, in accordance with the manufacturer's instructions.
- 16.10 Window and door reveals should be insulated to minimise the effects of cold bridging. Where clearance is limited, strips of approved insulation should be installed to suit available margins and details.

Movement joints


16.11 Generally, surface-mounted movement joints are required at maximum 10 m centres but, if an expansion joint is incorporated in the substrate, then movement joints must be carried through the system (see Figure 4). This may necessitate the use of back-to-back full system stop beads with a mastic seal and backer strip depending on the width of the joint and the degree of movement anticipated. The need for additional expansion joints in the system is determined by the Certificate holder at the time of initial survey. The Certificate holder will take into account the construction format, building design and fenestration when determining the regularity and positioning of both vertical and horizontal expansion joints.

Figure 4 Movement joint detail

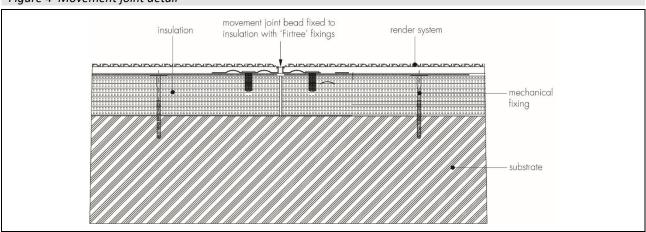


Basecoat and reinforcing mesh

- 16.12 Prior to the application of the basecoat and reinforcing mesh, a bead of low-modulus silicone sealant is applied at window and door frames, overhanging eaves, gas and electric meter boxes, and wall vents, or where the render abuts any other building material or surface. Appropriate sealing tape may be used if required between the insulation and the object to provide a weatherproof seal.
- 16.13 Structherm HP14 High Polymer Basecoat should be mixed with 5 to 6 litres of potable water per 25 kg bag with an electric paddle mixer for a minimum of 5 minutes to disperse the additives.
- 16.14 A 3 mm thick layer of basecoat should be applied to the surface of the insulation using a stainless steel trowel or a render pump.
- 16.15 Reinforcing mesh is applied and immediately embedded into the basecoat using the trowel, overlapping at all mesh joints by at least 100 mm.
- 16.16 It is important to make sure that the reinforcing mesh is free of wrinkles and completely covered by basecoat.
- 16.17 Once the mesh is fully embedded in the first layer of basecoat, holes are drilled through the mesh and boards into the substrate wall at the specified frequency, and in a regular pattern, but not less than seven fixings per square metre (see Figure 5 and section 7.10). The mechanical fixings are inserted and tapped or screwed firmly into place. The fixings are slightly overdriven so that a small depression is created in the render.

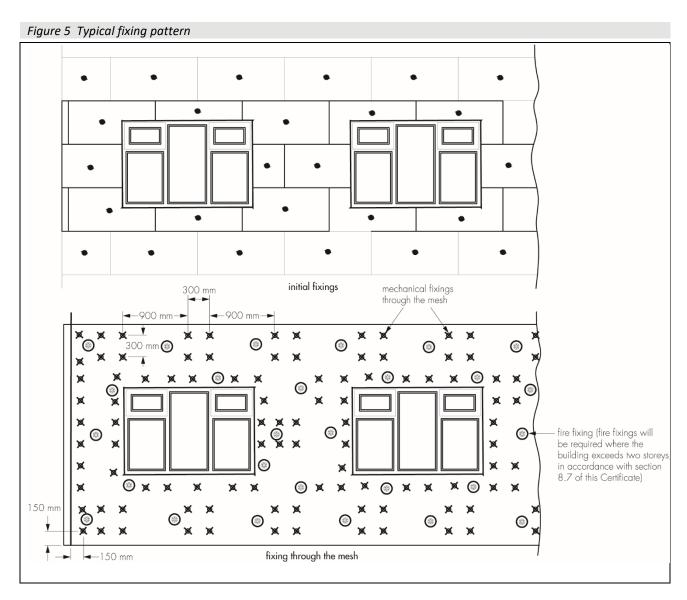

16.18 To provide the necessary reinforcement, stress patches of reinforcement mesh (approximate size 300 by 200 mm) are applied with basecoat, diagonally over the insulation boards at the corners of openings (see Figure 6). Angle beads and stop beads are positioned in accordance with the Certificate holder's installation instructions. The stress patches are applied after the main mesh layer has been applied.

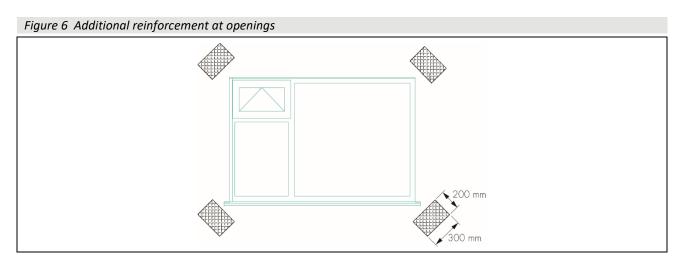


16.19 Stress patches of reinforcing mesh (150 by 150 mm) are applied over the mechanical fixing heads and fully embedded within the basecoat. Alternatively, a second layer of mesh can be blanket applied over the fixings and bedded in with the basecoat. Further basecoat is applied to maintain an approximate 6 mm thickness when measured from the top of the fixings. The surface of the basecoat should be given a light diagonal scratch to provide a key for the dash receiver coat. If the building exceeds two storeys, stainless steel fire fixings should then be installed using a pattern that achieves a minimum of 1 fixing per 1 m² (see Figure 5).

16.20 The basecoat should be left to dry thoroughly (approximately 72 hours) before application of the render finish.

Render finish

- 16.21 Struc-Dash should be mixed with 5 to 6 litres of potable water per 25 kg bag for a minimum of 10 minutes with an electric paddle mixer to disperse the additives.
- 16.22 The receiver should then be trowel-applied to the surface of the basecoat to a thickness of 8 mm. The selected dash aggregate can then be thrown at the surface of the wet dash render.
- 16.23 Continuous surfaces must be completed without a break, and the coatings must always be applied to a wet edge.
- 16.24 At the tops of walls, the system must be protected by an adequate overhang or by an adequately sealed, purpose-made flashing (see Figure 7).

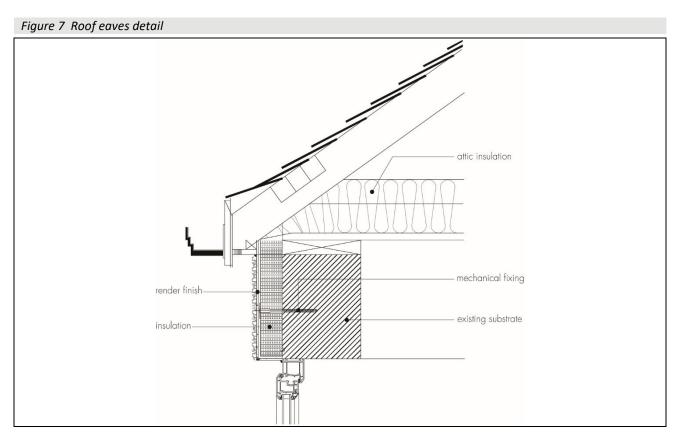

16.25 Care should be taken in the detailing of the system around features such as openings, projections and at eaves (see Figures 7 and 8) to ensure adequate protection against water ingress and to limit the risk of water penetrating the system. To achieve a 60-year service life, the system is finished against a stainless-steel stop bead at reveals.

16.26 On completion of the installation, external fittings, eg rainwater goods, are re-fixed through the system into the substrate in accordance with the Certificate holder's instructions.

Figure 8 Typical window reveal detail substrate substrate mechanical fixing fixing corner bead render system corner bead render system low modulus new sill low modulus insulation silicone sealant insulation silicone sealant detail at reveal (flush) detail at reveal (recessed) new sill low modulus silicone sealant render system substrate insulation fixing detail of sill

Technical Investigations

17 Investigations

17.1 Tests were conducted and the results assessed to determine:

- wind load resistance
- thermal resistance
- fire performance
- hygrothermal performance
- resistance to frost
- resistance to impact
- water absorption (capillary test)
- water vapour permeability.

17.2 An assessment was made of data relating to:

- the risk of interstitial condensation
- thermal conductivity
- durability
- strength and stability.

17.3 The practicability of installation and the effectiveness of detailing techniques were examined.

17.4 The manufacturing process was evaluated, including the methods adopted for quality control, and details were obtained of the quality and composition of the materials used.

Bibliography

BRE Report BRE 135: 2013 Fire performance of external thermal insulation for walls of multi-storey buildings

BRE Report BRE 262: 2002 Thermal insulation: avoiding risk

BRE Report BRE 443: 2006 Conventions for U-value calculations

BS 5250: 2011 + A1: 2016 Code of practice for control of condensation in buildings

BS 8000-0: 2014 Workmanship on construction sites — Introduction and general principles

BS 8000-2.2 : 1990 Workmanship on building sites — Code of practice for concrete work — Sitework with in situ and precast concrete

BS 8000-3: 2001 Workmanship on building sites — Code of practice for masonry

BS EN 1990: 2002 + A1: 2005 Eurocode — Basis of structural design

BS EN 1991-1-4: 2005 + A1: 2010 Eurocode 1 — Actions on structures — General actions — Wind actions

BS EN 1992-1-1 : 2004 + A1 : 2014 Eurocode 2 — Design of concrete structures — General rules and rules for buildings NA to BS EN 1992-1-1 : 2004 + A1 : 2014 UK National Annex to Eurocode 2 — Design of concrete structures — General rules and rules for buildings

BS EN 1996-1-1:2005+A1:2012 Eurocode 6-Design of masonry structures -General rules for reinforced and unreinforced masonry structures

NA to BS EN 1996-1-1 : 2005 + A1 : 2012 UK National Annex to Eurocode 6 - Design of masonry structures — General rules for reinforced and unreinforced masonry structures

BS EN 1996-2 : 2006 Eurocode 6 — Design of masonry structures — Design considerations, selection of materials and execution of masonry

NA to BS EN 1996-2 : 2006 UK National Annex to Eurocode 6 — Design of masonry structures — Design considerations, selection of materials and execution of masonry

BS EN 10088-2 : 2014 Stainless steel — Technical delivery conditions for sheet/plate and strip of corrosion resisting steels for general purposes

BS EN 13166 : 2012 + A2 : 2016 Thermal insulation products for buildings — Factory made phenolic foam (PF) products — Specification

BS EN 13501-1 : 2018 Fire classification of construction products and building elements —Classification using test data from reaction to fire tests

BS EN 13914-1 : 2016 Design, preparation and application of external rendering and internal plastering — External rendering

BS EN ISO 6946 : 2017 Building components and building elements — Thermal resistance and thermal transmittance — Calculation method

BS EN ISO 9001 : 2015 Quality management systems — Requirements

BS EN ISO 14001: 2015 Environmental management systems — Requirements

BS ISO 45001 : 2018 Occupational Health & Safety Management System – Requirements with guidance for use

EAD 330196-00-0604 : 2016 Plastic anchors made of virgin or non-virgin material for fixing of external thermal insulation composite systems with rendering

EOTA TR051: 2016 Recommendations for job-site tests of plastic anchors and screws

ETAG 004 : 2013 Guideline for European Technical Approval of Plastic Anchors for fixing of External Thermal Composite Systems with Rendering.

Conditions of Certificate

Conditions

- 1. This Certificate:
- relates only to the product that is named and described on the front page
- is issued only to the company, firm, organisation or person named on the front page no other company, firm, organisation or person may hold or claim that this Certificate has been issued to them
- is valid only within the UK
- has to be read, considered and used as a whole document it may be misleading and will be incomplete to be selective
- is copyright of the BBA
- is subject to English Law.
- 2. Publications, documents, specifications, legislation, regulations, standards and the like referenced in this Certificate are those that were current and/or deemed relevant by the BBA at the date of issue or reissue of this Certificate.
- 3 This Certificate will be displayed on the BBA website, and the Certificate Holder is entitled to use the Certificate and Certificate logo, provided that the product and its manufacture and/or fabrication, including all related and relevant parts and processes thereof:
- are maintained at or above the levels which have been assessed and found to be satisfactory by the BBA
- continue to be checked as and when deemed appropriate by the BBA under arrangements that it will determine
- are reviewed by the BBA as and when it considers appropriate.
- 4. The BBA has used due skill, care and diligence in preparing this Certificate, but no warranty is provided.
- 5. In issuing this Certificate the BBA is not responsible and is excluded from any liability to any company, firm, organisation or person, for any matters arising directly or indirectly from:
- the presence or absence of any patent, intellectual property or similar rights subsisting in the product or any other product
- the right of the Certificate holder to manufacture, supply, install, maintain or market the product
- actual installations of the product, including their nature, design, methods, performance, workmanship and maintenance
- any works and constructions in which the product is installed, including their nature, design, methods, performance, workmanship and maintenance
- any loss or damage, including personal injury, howsoever caused by the product, including its manufacture, supply, installation, use, maintenance and removal
- any claims by the manufacturer relating to UKCA, UKNI or CE marking.
- 6. Any information relating to the manufacture, supply, installation, use, maintenance and removal of this product which is contained or referred to in this Certificate is the minimum required to be met when the product is manufactured, supplied, installed, used, maintained and removed. It does not purport in any way to restate the requirements of the Health and Safety at Work etc. Act 1974, or of any other statutory, common law or other duty which may exist at the date of issue or reissue of this Certificate; nor is conformity with such information to be taken as satisfying the requirements of the 1974 Act or of any statutory, common law or other duty of care.

British Board of Agrément 1st Floor, Building 3, Hatters Lane Croxley Park, Watford Herts WD18 8YG

tel: 01923 665300 clientservices@bbacerts.co.uk www.bbacerts.co.uk