



Structerm
STRUCTURAL INSULATED FACADES

Red Dragwire

Red Dragwire

From the  **Feldhaus Klinker**
WIR GEHÖREN ZUM GUTEN TON. range.

Manufactured to DIN EN 771-1
and DIN 105-100

Type
Extruded Clay Brick Slips

Standard work size
215 x 20 x 65mm

Dimensional tolerances
Tolerance category: T1
Range category: R1

Compressive strength
15N/mm²

Water absorption
≤ 6%

Durability
F2


Active soluble salts content
S2

Reaction to Fire
A1

Dry weight per slip
0.45kg

Pack sizes
24 per box / 96 boxes per pallet

Part Number
DBA401

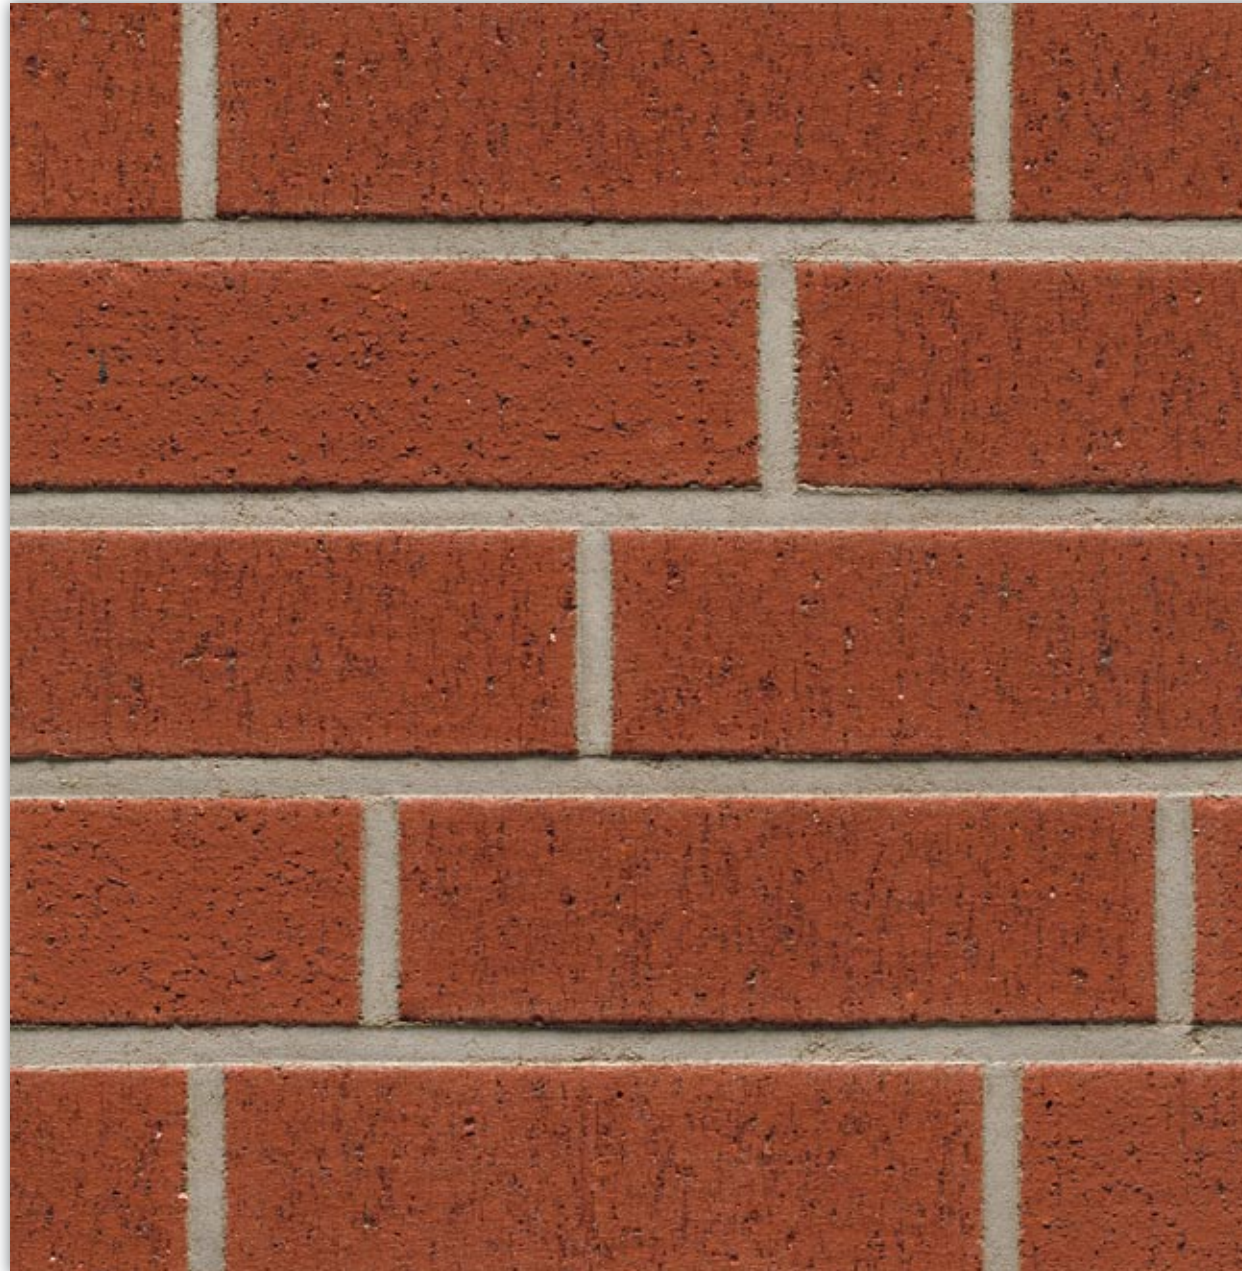

Structherm
STRUCTURAL INSULATED FACADES

Structherm Ltd

Bent Ley Road
Meltham
Holmfirth
West Yorkshire
HD9 4AP

t: 01484 850098
f: 01484 851388
e: info@structherm.co.uk

www.structherm.co.uk

 **Feldhaus Klinker**
WIR GEHÖREN ZUM GUTEN TON.

DISCLAIMER:
The reproduction of colours and textures is only as accurate as the printing process will allow. Photographic samples should be used when shortlisting products but we advise that an actual sample should be seen before ordering.