



EJOT IDK-N 8/60

EJOT®

Hammer-in anchor with plastic nail
Fastening of insulation boards (without ETA-approval)

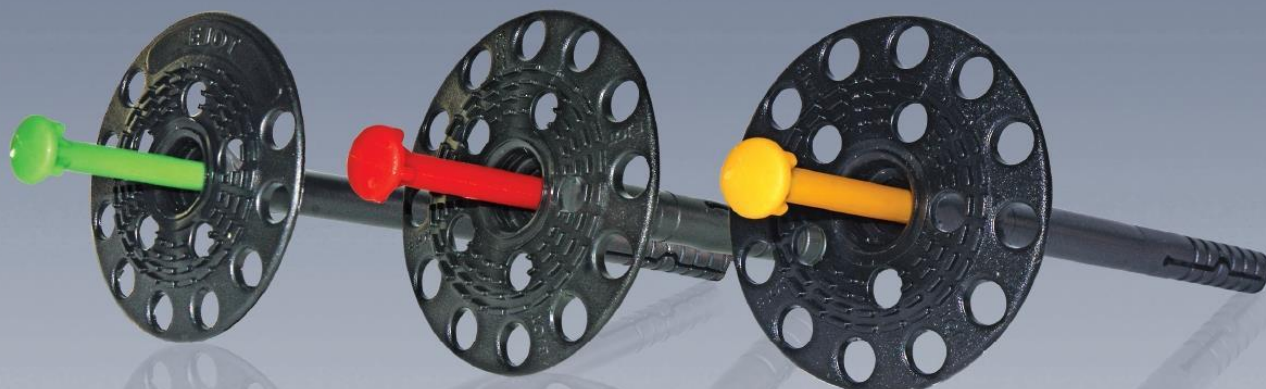

Installation

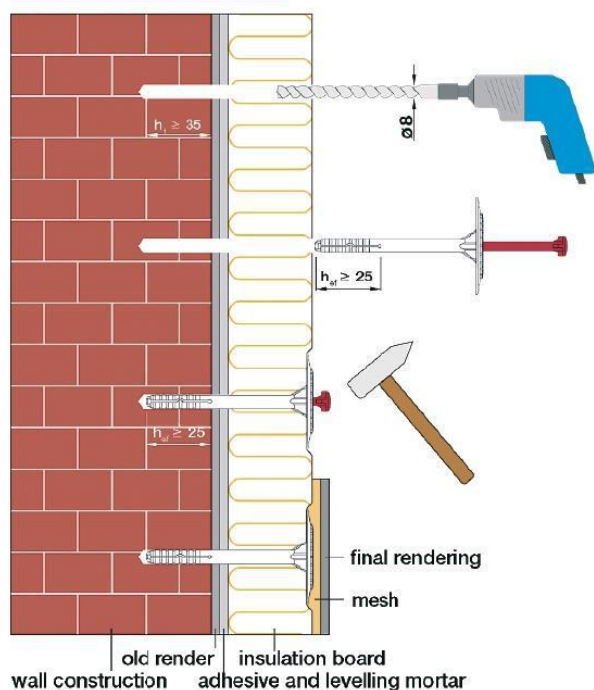

Advantages

- Safe anchoring in concrete and solid masonry
- Can be used with an additional spreader washer
- Coloured moulding to distinguish the various lengths
- Premounted nail for quick installation
- Manufactured from high grade plastic

EJOT® The Quality Connection
www.ejot.co.uk

EJOT IDK-N 8/60

Hammer-in anchor with plastic nail
 Fastening of insulation boards (without ETA-approval)

Technical Data

Anchor diameter	8 mm
Washer diameter	60 mm
Drill hole depth $h_1 \geq$	35 mm
Embedment depth $h_{ef} \geq$	25 mm
Point thermal transmission	0,000 W/K

Recommended Use Loads

		
Concrete		0,15 kN
Clay bricks		0,15 kN
Solid lime sandstone		0,15 kN



Product Range

Insulation (mm)		Product name and length (mm)	Colour of nail	Product Code	Packaging (pieces)	Pallet Unit (pieces)
New build ¹⁾	Renovation ²⁾					
40	20	EJOT IDK-N 8/60 x 075	Red	8546 075 156	200	8,000
60	40	EJOT IDK-N 8/60 x 095	Beige	8546 095 156	200	6.000
80	60	EJOT IDK-N 8/60 x 115	Yellow	8546 115 156	200	6.000
100	80	EJOT IDK-N 8/60 x 135	Light Green	8546 135 156	200	5.400
120	100	EJOT IDK-N 8/60 x 155	White	8546 155 156	200	3.600
140	120	EJOT IDK-N 8/60 x 175	Orange	8546 175 156	200	3.600

1) 10 mm adhesive 2) 10 mm adhesive and 20 mm old render

Note: Anchor without European Technical Approval (ETA).

EJOT UK Ltd, Hurricane Close,
 Sherburn-in-Elmet, Leeds LS25 6PB.

Tel: 01977 687040
Fax: 01977 687041
Email: info@ejot.co.uk

EJOT[®]
 The Quality Connection
www.ejot.co.uk